

CLEARED
 FOR OPEN PUBLICATION
Grace A. Green
 FEB 23 1994

PUBLIC AFFAIRS OFFICE
 NAVAL AIR SYSTEMS COMMAND

STANDARD AIRCRAFT CHARACTERISTICS

P-3C UPDATE II

LOCKHEED


NOTE:

ALL INQUIRES CONCERNING DATA
 IN THIS CHART SHOULD BE DIRECTED
 TO NAVAIR, CODE 53012


NAVAL AIR SYSTEMS COMMAND
NAVY DEPARTMENT

NAVAL AIR SYSTEMS COMMAND
NAVY DEPARTMENT

NOTE: USABLE TANK CAPACITIES
INDICATED

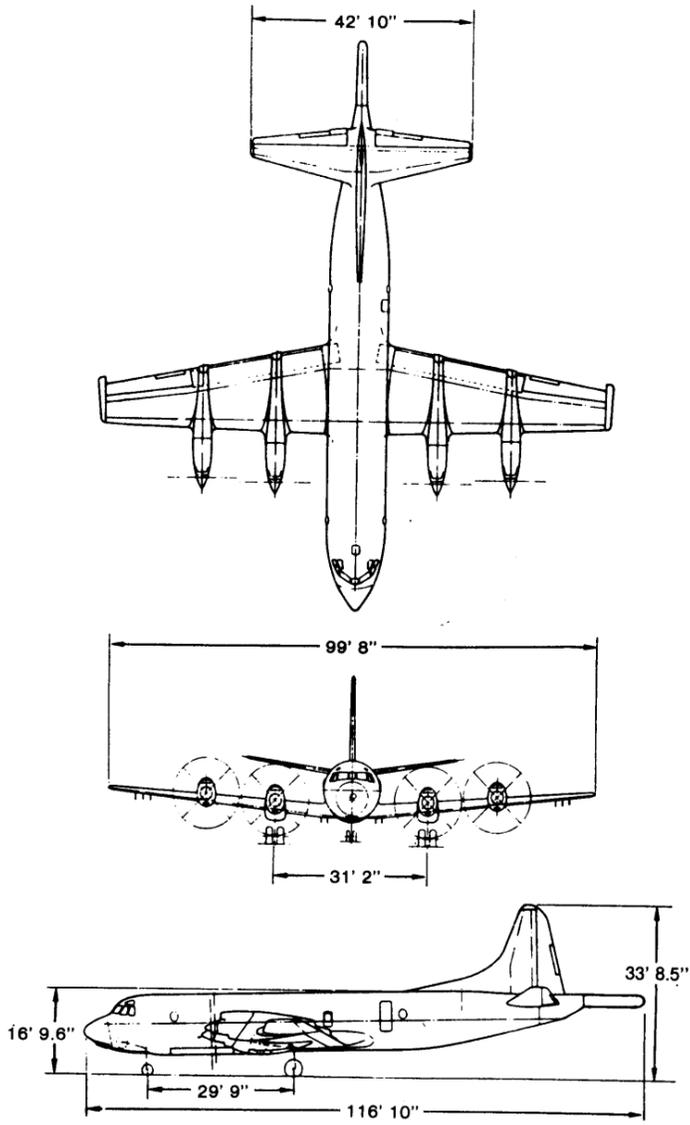

DESCRIPTIVE ARRANGEMENT

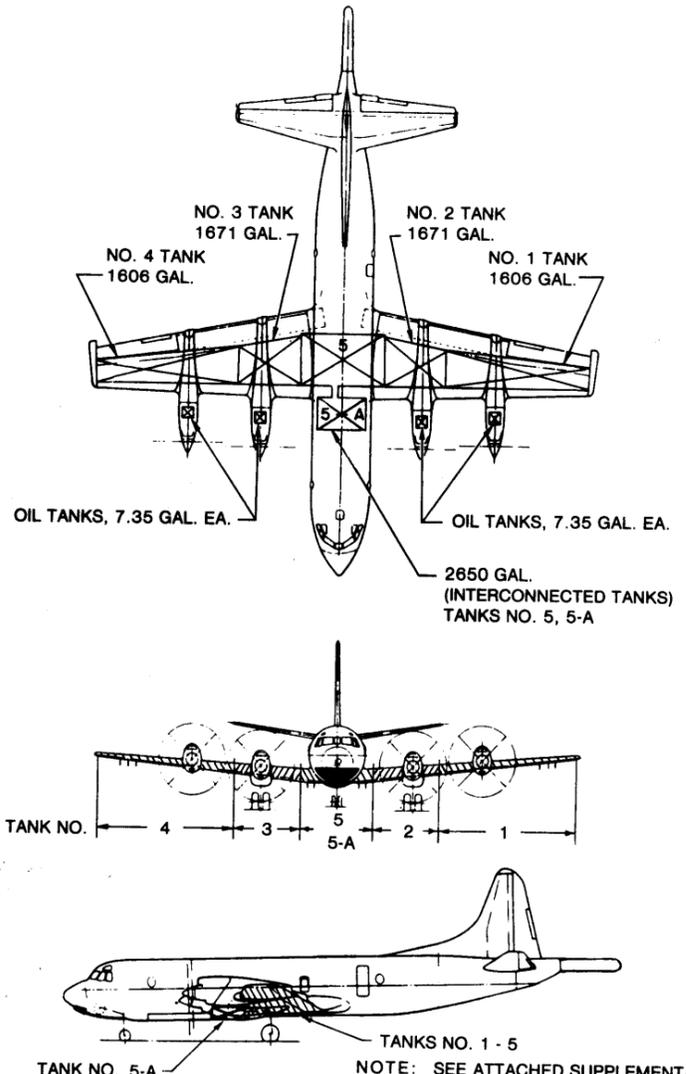

TANKAGE

NOTE: SEE ATTACHED SUPPLEMENTAL
SHEET FOR ARMAMENT
INSTALLATIONS

POWER PLANT	MISSION AND DESCRIPTION	WEIGHTS																																											
<p>NO. AND MODEL (4) T56-A-14 MANUFACTURER Allison SPECIFICATION 870-D, 1 Jan. 1976 PROPELLER MFGR. Ham. Std. NO. BLADES/DIA. 4/13.5 Ft. PROPELLER NO. 54H80-77/A7121B-2 PROPELLER GEAR RATIO 1:13.54 PROPELLER SPEC 1845A</p> <p>RATINGS</p> <table border="1"> <thead> <tr> <th>RATING</th> <th>ESHP</th> <th>EXHAUST THRUST</th> <th>RPM</th> </tr> </thead> <tbody> <tr> <td>T.O.</td> <td>4910</td> <td>797</td> <td>13,820</td> </tr> <tr> <td>Military</td> <td>4680</td> <td>781</td> <td>13,820</td> </tr> <tr> <td>Normal</td> <td>4365</td> <td>760</td> <td>13,820</td> </tr> </tbody> </table>	RATING	ESHP	EXHAUST THRUST	RPM	T.O.	4910	797	13,820	Military	4680	781	13,820	Normal	4365	760	13,820	<p>The Lockheed P-3C Update II airplane is designed to detect, locate, and destroy enemy submarines and cargo vessels. Additional mission capabilities include the following: barrier patrol, convoy escort, mining, surveillance, and reconnaissance. Elements of these missions may be performed either completely independently or in support of/supported by various elements of naval forces. Capabilities are provided to insure mission effectiveness in day, night, and all-weather conditions, with due consideration for potential contact with enemy forces.</p> <p>The P-3C Update II weapons bay, located in the bottom of the forward fuselage is 80 inches wide, 34.5 inches deep and 154 inches long. It is equipped with store suspension pylons designed to carry and release stores including torpedoes, depth bombs and mines.</p> <p>The P-3C Update II airplane is equipped with ten external store pylons mounted beneath the wing, five pylons on either side of the airplane center line. These pylons are used to ferry and release torpedoes and mines. Harpoon missiles can be launched from the third and fourth outermost pylons of each wing and they can be ferried on the innermost pylon of each wing.</p> <p>The data contained in these charts conform to the detail specification SD-536-2-11 and are valid for P-3C Update II aircraft covered under this specification (BuNos 161329 - 161340).</p>	<p>LOADINGS</p> <table border="1"> <thead> <tr> <th></th> <th>LBS.</th> <th>L.F.</th> </tr> </thead> <tbody> <tr> <td>Empty</td> <td>66,900</td> <td>-</td> </tr> <tr> <td>Max Zero Fuel Wt (No Wing Stores)</td> <td>77,200</td> <td>-</td> </tr> <tr> <td>Design (Flight)</td> <td>135,000</td> <td>3.0,-1.0</td> </tr> <tr> <td>Combat</td> <td>111,526</td> <td>3.0,-1.0</td> </tr> <tr> <td>Max. Take-Off, Normal</td> <td>139,760</td> <td>-</td> </tr> <tr> <td>Max. Take-Off, Overload</td> <td>142,000</td> <td>2.5,-0.8</td> </tr> <tr> <td>Max. Landing - Normal</td> <td>103,880</td> <td>2.0,-0</td> </tr> <tr> <td>Max. Landing - Overload</td> <td>114,000</td> <td>-</td> </tr> </tbody> </table>		LBS.	L.F.	Empty	66,900	-	Max Zero Fuel Wt (No Wing Stores)	77,200	-	Design (Flight)	135,000	3.0,-1.0	Combat	111,526	3.0,-1.0	Max. Take-Off, Normal	139,760	-	Max. Take-Off, Overload	142,000	2.5,-0.8	Max. Landing - Normal	103,880	2.0,-0	Max. Landing - Overload	114,000	-
RATING	ESHP	EXHAUST THRUST	RPM																																										
T.O.	4910	797	13,820																																										
Military	4680	781	13,820																																										
Normal	4365	760	13,820																																										
	LBS.	L.F.																																											
Empty	66,900	-																																											
Max Zero Fuel Wt (No Wing Stores)	77,200	-																																											
Design (Flight)	135,000	3.0,-1.0																																											
Combat	111,526	3.0,-1.0																																											
Max. Take-Off, Normal	139,760	-																																											
Max. Take-Off, Overload	142,000	2.5,-0.8																																											
Max. Landing - Normal	103,880	2.0,-0																																											
Max. Landing - Overload	114,000	-																																											
<p>ELECTRONICS</p>	<p>DEVELOPMENT</p>	<p>FUEL AND OIL</p>																																											
<p><u>Communication</u></p> <p>Data Terminal AN/ACQ-5A Teletypewriter AN/AGC-6 Intercomm AN/AIC-22(V)1 UHF AN/ARC-143B HF AN/ARC-161 Emerg. Trans AN/PRT-5 Crash Locator AN/URT-26(V) VHF Comm Group 618N-3/A</p> <p><u>Navigation</u></p> <p>True Airspeed A/A24G-9 Central Repeater AM-4923/A Flight Director System AN/AJN-15 Altimeter AN/APN-194(V) Navigation Set, Radar AN/APN-227 RAWS AN/APQ-107 UHF DF AN/ARA-50 LF-DF AN/ARN-83 Omega AN/ARN-99(V)1 TACAN AN/ARN-118(V) AFCS AN/ASW-31A Horiz. Situation Ind. ID-1540/A Periscope Sextant MS28011-7 OTPI Receiver R1651/ARA Sonobuoy Reference Set AN/ARS-3 VHF Navigation Group VIR-31 Inertial Nav. System LTN-72</p> <p>--- Continued on NOTES page.</p>	<p>FIRST FLIGHT, P-3A 30 MARCH 1961 FLEET SERVICE, P-3A 13 AUGUST 1962 FIRST FLIGHT, P-3B 24 SEPTEMBER 1965 FLEET SERVICE, P-3B 1 JANUARY 1966 FLEET SERVICE, P-3B WITH ECP-494 26 AUGUST 1967 FIRST FLIGHT, YP-3C 18 SEPTEMBER 1968 FLEET SERVICE, P-3C 12 JUNE 1969 FIRST FLIGHT, P-3C UDI 27 FEBRUARY 1974 FLEET SERVICE, P-3C UDI 1 MAY 1974 FIRST FLIGHT, P-3C UDII 30 NOVEMBER 1971 FLEET SERVICE, P-3C UDII 5 MARCH 1977</p>	<p>FUEL</p> <table border="1"> <thead> <tr> <th>NO. TANKS</th> <th>GALS.*</th> <th>LOCATION</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>3212</td> <td>Wing (Outboard)</td> </tr> <tr> <td>2</td> <td>3342</td> <td>Wing (Inboard)</td> </tr> <tr> <td>1</td> <td>2650</td> <td>Center and Fuselage Aux.</td> </tr> <tr> <td>Total</td> <td>9204</td> <td></td> </tr> </tbody> </table> <p>FUEL JP-5 FUEL SPEC MIL-F-5624C * Total usable fuel.</p> <p>OIL</p> <p>Total Usuable Capacity (Gals.) 21 Spec MIL-L-7808C</p>	NO. TANKS	GALS.*	LOCATION	2	3212	Wing (Outboard)	2	3342	Wing (Inboard)	1	2650	Center and Fuselage Aux.	Total	9204																													
NO. TANKS	GALS.*	LOCATION																																											
2	3212	Wing (Outboard)																																											
2	3342	Wing (Inboard)																																											
1	2650	Center and Fuselage Aux.																																											
Total	9204																																												
	<p>DIMENSIONS</p> <p>WING: Area 1300 Sq. Ft. Span 99 Ft. 8 In. M.A.C. 168.7 In. LENGTH 116 Ft. 10 In. HEIGHT 33 Ft. 8.5 In. TREAD 31 Ft. 2 In. PROP. GRD. CLEARANCE 21.75 In.</p>	<p>ORDNANCE</p> <table border="1"> <thead> <tr> <th>STATIONS</th> <th>PAYLOAD</th> </tr> </thead> <tbody> <tr> <td>9 & 18</td> <td>500 lb class store</td> </tr> <tr> <td>10 & 17</td> <td>1000 lb class store</td> </tr> <tr> <td>11 & 16</td> <td>2000 lb class store</td> </tr> <tr> <td>12 & 15</td> <td>2000 lb class store</td> </tr> <tr> <td>13 & 14</td> <td>2000 lb class store</td> </tr> <tr> <td>Internal</td> <td>Limited by size of stores</td> </tr> </tbody> </table>	STATIONS	PAYLOAD	9 & 18	500 lb class store	10 & 17	1000 lb class store	11 & 16	2000 lb class store	12 & 15	2000 lb class store	13 & 14	2000 lb class store	Internal	Limited by size of stores																													
STATIONS	PAYLOAD																																												
9 & 18	500 lb class store																																												
10 & 17	1000 lb class store																																												
11 & 16	2000 lb class store																																												
12 & 15	2000 lb class store																																												
13 & 14	2000 lb class store																																												
Internal	Limited by size of stores																																												

PERFORMANCE SUMMARY

TAKE-OFF LOADING CONDITION	① ASW1 4 MK-46/1 B-57	③ RECON 2 MK-46/4 AGM-84A	⑤ MINELAYING 10 MK-36	⑦ OVERLOAD MINELAYING 10 MK-36	⑧ FERRY 6 PYLONS	
TAKE-OFF WEIGHT	lb.	138,902	139,760	139,760	142,000	133,175
Fuel (JP-5)	lb.	62,587	59,530	55,940	58,180	62,587
Payload	lb.	4,829	8,279	12,000	12,000	500
Wing loading	lb./sq. ft.	106.8	107.5	107.5	109.2	102.4
Stall speed—power-off	kn.	123	123	123	125	121
Take-off run at S.L.— calm (A)	ft.	4,650	4,660	4,660	4,680	4,200
Take-off to clear 50 ft.— calm (A)	ft.	6,020	6,080	6,170	6,240	5,480
Max. speed/altitude (B)	kn./ft.	382/10,000	358/9,000	339/7,000	338/7,000	376/9,000
Rate of climb at S.L. (B)	fpm.	1,840	1,700	1,580	1,530	1,940
Time: S.L. to 10,000 ft. (B)	min.	6.7	7.5	8.4	8.7	6.4
Time: S.L. to 20,000 ft. (B)	min.	18.4	23.5	29.2	31.5	18.0
Service ceiling (100 fpm) (B)	ft.	24,000	22,300	20,700	20,200	24,900
Combat range	n.mi.	4,405	3,705	3,220	3,345	4,522
Average cruising speed	kn.	349	330	275	277	350
Cruising altitude(s)	ft.	22,600/32,300	20,100/29,600	19,200/27,800	18,700/27,700	22,650/34,400
Combat radius/mission time	n.mi./hr.	1,585/12.9	1,225/11.8	1,310/8.8	1,415/9.1	
Average cruising speed	kn.	363	320	285	309	
Search time(s)/altitude(s)	hr/ft.	3/20,000;1/200	3/5,000;1/200			
Search speed(s)	kn.	273/192	226/194			
COMBAT LOADING CONDITION	② STORES RETAINED	④ STORES RETAINED	⑥ MINES EXPENDED	⑧ MINES EXPENDED		
COMBAT WEIGHT	lb.	113,867	115,948	105,384	106,728	
Engine power		MILITARY	MILITARY	MILITARY	MILITARY	
Fuel	lb.	37,552	35,718	33,564	34,908	
Combat speed/combat altitude	kn./ft.	403/20,000	368/5,000	364/200	363/200	
Rate of climb/combat altitude	fpm/ft.	1,110/20,000	2,260/5,000	2,870/200	2,820/200	
Combat ceiling (500 fpm)	ft.	27,000	25,400	28,700	28,300	
Rate of climb at S.L.	fpm.	2,630	2,490	2,880	2,830	
Max. speed at S.L.	kn.	366	348	363	362	
Max. speed/altitude	kn./ft.	404/16,000	377/15,000	399/16000	398/16000	
LANDING WEIGHT	lb.	82,574	86,183	77,414	77,638	76,847
Fuel	lb.	6,259	5,953	5,594	5,818	6,259
Stall speed—power-off/approach power	kn./kn.	88/82	90/83	85/79	86/79	85/78
Landing distance-groundroll/over 50 ft. obst.	ft./ft.	1,510/2,240	1,580/2,340	1,430/2,120	1,440/2,140	1,410/2,090

NOTES

PERFORMANCE BASIS: Flight tests.





(A) MILITARY POWER
(B) NORMAL POWERRANGE AND/OR RADIUS: Fuel reserves ten percent of initial
useable fuel per OPNAV Instruction 3710.7H.

PERFORMANCE SUMMARY				
TAKE-OFF LOADING CONDITION	(10) ASW2 4 MK-46/2 AGM-84A	(12) MAXIMUM INTERNAL 6 MK-46	(14) PATROL AND ESCORT 4 MK-46/4 AGM-84A	(16) LOW ALTITUDE PATROL 4 MK-46/4 AGM-84A
TAKE-OFF WEIGHT	lb.	139,760	139,467	139,760
Fuel (JP-5)	lb.	61,205	62,587	58,429
Payload	lb.	6,839	5,399	9,339
Wing loading	lb./sq. ft.	107.5	107.3	107.5
Stall speed—power-off	kn.	123	123	123
Take-off run at S.L.— calm (A)	ft.	4,660	4,660	4,660
Take-off to clear 50 ft.— calm (A)	ft.	6,100	6,030	6,140
Max. speed/altitude (B)	kn./ft.	370/10,000	383/10,500	358/9,000
Rate of climb at S.L. (B)	fpm.	1,780	1,830	1,700
Time: S.L. to 10,000 ft. (B)	min.	7.0	6.7	7.4
Time: S.L. to 20,000 ft. (B)	min.	20.9	19.2	22.8
Service ceiling (100 fpm) (B)	ft.	23,300	24,000	22,400
Combat range	n.mi.	4,040	4,414	3,645
Average cruising speed	kn.	345	350	328
Cruising altitude(s)	ft.	20,900/30,500	22,500/32,100	20,100/29,300
Combat radius/mission time	n.mi./hr.	1,370/12.3	1,545/13.2	1,280/11.5
Average cruising speed	kn.	334	344	353
Search time(s)/altitude(s)	hr./ft.	2/20,000;2/200	3/20,000;1/200	2/5,000;2/200
Search speed(s)	kn.	277/195	273/192	220/196
COMBAT LOADING CONDITION	(11) STORES RETAINED	(13) STORES RETAINED	(15) STORES RETAINED	(17) STORES RETAINED
COMBAT WEIGHT	lb.	115,278	114,432	116,388
Engine power		MILITARY	MILITARY	MILITARY
Fuel	lb.	36,723	37,552	35,057
Combat speed/combat altitude	kn./ft.	387/20,000	402/20,000	367/5,000
Rate of climb/combat altitude	fpm/ft.	1,020/20,000	1,120/20,000	2,210/5,000
Combat ceiling (500 fpm)	ft.	26,000	27,000	25,000
Rate of climb at S.L.	fpm.	2,540	2,640	2,430
Max. speed at S.L.	kn.	359	370	351
Max. speed/altitude	kn./ft.	390/15,000	404/15,000	379/15,000
LANDING WEIGHT	lb.	84,676	83,139	87,174
Fuel	lb.	6,121	6,259	5,843
Stall speed—power-off/approach power	kn./kn.	89/83	88/82	90/84
Landing distance-groundroll/over 50 ft. obst.	ft./ft.	1,540/2,250	1,520/2,240	1,650/2,350

PERFORMANCE BASIS: Flight tests.
 RANGE AND/OR RADIUS: Fuel reserves ten percent of initial useable fuel per OPNAV Instruction 3710.7H.

NOTES

- (A) MILITARY POWER
- (B) NORMAL POWER

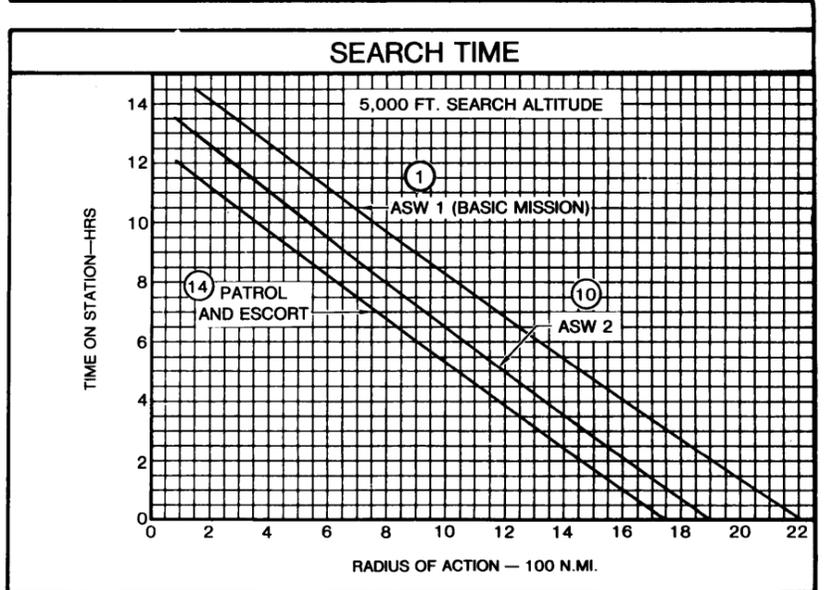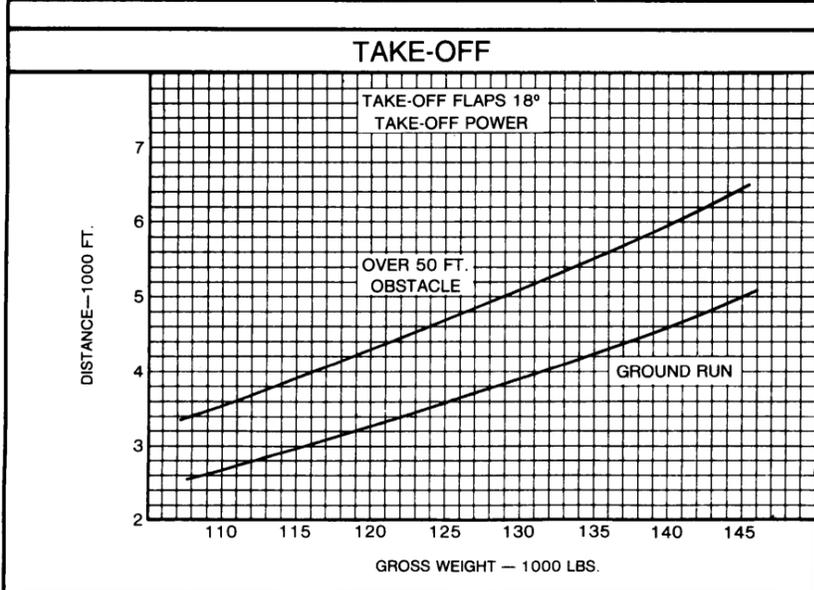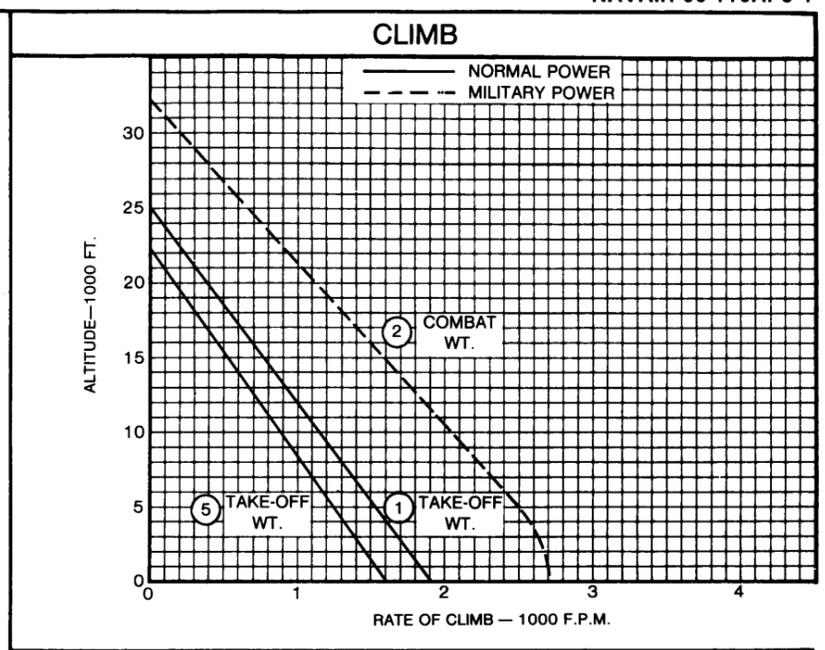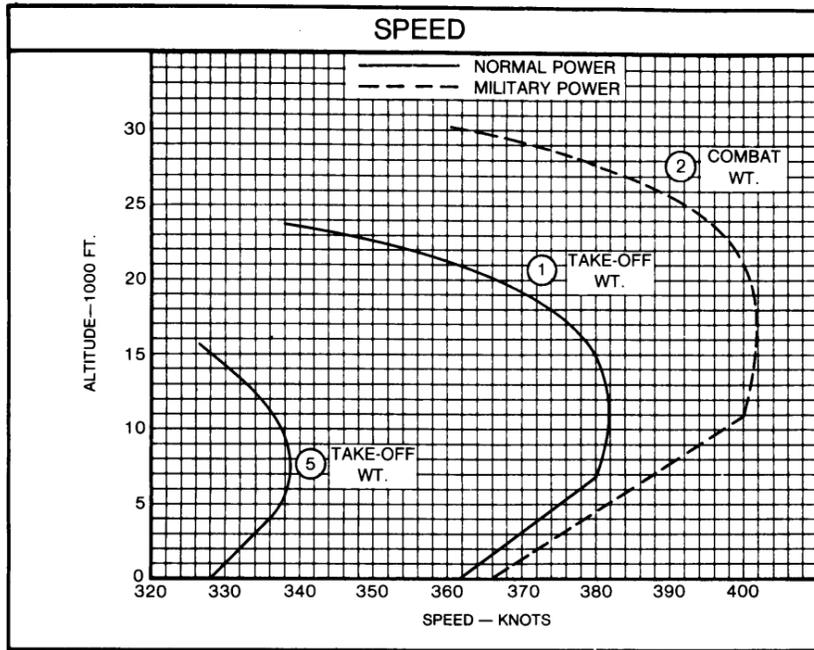

○ LOADING CONDITION COLUMN NUMBER

NAVAL AIR SYSTEMS COMMAND
NAVY DEPARTMENT

WING ARMAMENT STORES

AERO 15D LAUNCHER
VIEW LOOKING AFT

TYPE OF STORE	QTY.	WING STORES STATIONS									
		18	17	16	15	14	13	12	11	10	9
TORPEDO	10	●	●	●	●	●	●	●	●	●	●

MINE LOADING - WING

AERO 65A1 BOMB RACK
VIEW LOOKING AFT

DESIGNATION	QTY.	WING STORES STATIONS									
		18	17	16	15	14	13	12	11	10	9
MK 52	10	○	○	○	○	○	○	○	○	○	○
MK 38 MK 52	8			○	○	○	○				
MK 25 MK 39 MK 55 MK 56	6				○	○	○				

MISSILE LOADING - WING

AERO 65A1 BOMB RACK
VIEW LOOKING AFT

STORE TYPE	QTY.	WING STORES STATIONS									
		18	17	16	15	14	13	12	11	10	9
HARPOON	6			○	○	●	●			○	○
HARPOON	4				○	●	●			○	
HARPOON	2					●	●				

● FERRY ONLY, NO LAUNCH

ARMAMENT

NAVAL AIR SYSTEMS COMMAND
NAVY DEPARTMENT

TORPEDO LOADING, BOMB BAY

STORES STATIONS - VIEW LOOKING FORWARD

DEPTH BOMB LOADING, BOMB BAY

DEPTH BOMB CONFIG.

TORPEDO AND DEPTH BOMB CONFIG.

STORES STATIONS - VIEW LOOKING FORWARD

MINE LOADING, BOMB BAY

1000/2000 LB. MINE CONFIG.

500 LB. MINE CONFIG.

STORES STATIONS - VIEW LOOKING FORWARD

NUMBERS SHOWN ARE STORES LOADING STATIONS.
LOADING SEQUENCE AND OTHER DETAILS ARE SHOWN ON BOMB BAY DECALS.

ARMAMENT

STORE LOADING^(A)

WING STATION NO.	9 & 18	10 & 17	11 & 16	12 & 15	13 & 14	INTERNAL		
MINES	(1) MK-53 — — — — —	(1) MK-53 (1) MK-36 (1) MK-52 — — —	(1) MK-53 (1) MK-36 (1) MK-52 (1) MK-25 (1) MK-55 (1) MK-56	(6) MK-53 (3) MK-36 (3) MK-52 (1) MK-25 (1) MK-55 (1) MK-56 (8) MK-41 (PRACTICE MINES)				
TORPEDOES (B)	(1) MK-44 (1) MK-46	(1) MK-44 (1) MK-46	(1) MK-44 (1) MK-46	(1) MK-44 (1) MK-46	(1) MK-44 (1) MK-46	(8) MK-44 (8) MK-46		
ROCKETS/MISSILES		(1) AGM-84A	(1) AGM-84A	—	(1) AGM-84A	—		
DEPTH BOMBS	— — —	— — —	— — —	— — —	— — —	(3) B-57		
PARACHUTE FLARES (C)	(1) MK-5 (1) MK-6 (1) MK-24 (6) MK-5 (6) MK-6 (6) MK-24	(1) MK-5 (1) MK-6 (1) MK-24 (6) MK-5 (6) MK-6 (6) MK-24	(1) MK-5 (1) MK-6 (1) MK-24 — — —	(1) MK-5 (1) MK-6 (1) MK-24 — — —	(1) MK-5 (1) MK-6 (1) MK-24 — — —	— — — — — —		
ROCKET LAUNCH (D)	(1) LAU 10/A (1) LAU 10A/A (1) AERO 6A (1) AERO 7D (1) LAU 3A/A (1) LAU 32A/A (1) LAU 69/A							
			NOTES: SEE NEXT PAGE FOR NOTES (A) THRU (E).					

NOTES

ASW1

(Basic Mission)

WARM-UP, TAXI, TAKE-OFF: 5 minutes with maximum continuous power at sea level.

CLIMB: On course with normal power to 22,600 feet cruise altitude, limited to cruise ceiling.

CRUISE OUT: At 22,600 feet at speed for maximum range.

DESCEND: To 20,000 feet — No fuel is used; No distance is gained.

SEARCH: At 20,000 feet for 3 hours at the speed for maximum endurance.

DESCEND: To 200 feet — No fuel is used; No distance is gained.

SEARCH: At 200 feet for 1 hour at the speed for maximum endurance.

CLIMB: On course with normal power to 32,300 feet cruise altitude, limited to cruise ceiling.

CRUISE-IN: At 32,300 feet at the speed for maximum range.

RESERVE: 10% of the initial fuel load.

A S W 2

WARM-UP, TAXI, TAKE-OFF: 5 minutes with maximum continuous power at sea level.

CLIMB: On course with normal power to 20,900 feet cruise altitude, limited to cruise ceiling.

CRUISE-OUT: At 20,900 feet at speed for maximum range.

DESCEND: To 20,000 feet — No fuel is used; No distance is gained.

SEARCH: At 20,000 feet for 2 hours at the speed for maximum endurance.

DESCEND: To 200 feet — No fuel is used; No distance is gained.

SEARCH: At 200 feet for 2 hours at the speed for maximum endurance.

CLIMB: On course with normal power to 30,500 feet cruise altitude limited to cruise ceiling.

CRUISE-IN: At 30,500 feet at the speed for maximum range.

RESERVE: 10% of the initial fuel load.

MAXIMUM INTERNAL

WARM-UP, TAXI, TAKE-OFF: 5 minutes with maximum continuous power at sea level.

CLIMB: On course with normal power to 22,500 feet cruise altitude, limited to cruise ceiling.

CRUISE-OUT: At 22,500 feet at speed for maximum range.

DESCEND: To 20,000 feet — No fuel is used; No distance is gained.

SEARCH: At 20,000 feet for 3 hours at the speed for maximum endurance.




DESCEND: To 200 feet — No fuel is used; No distance is gained.

SEARCH: At 200 feet for 1 hour at the speed for maximum endurance.

CLIMB: On course with normal rated power to 32,100 feet cruise altitude, limited to cruise ceiling.

CRUISE-IN: At 32,100 feet at the speed for maximum range.

RESERVE: 10% of the initial fuel load.

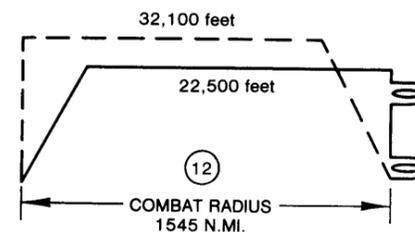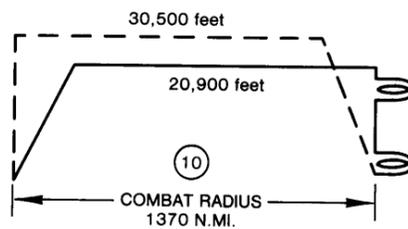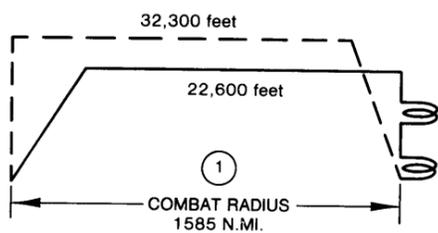

○ LOADING CONDITION COLUMN NUMBER

NOTES

RECONNAISSANCE

WARM-UP, TAXI, TAKE-OFF: 5 minutes with maximum continuous power at sea level.

CLIMB: On course with normal power to 20,100 feet cruise altitude, limited to cruise ceiling.

CRUISE-OUT: At 20,100 feet at speed for maximum range.

DESCEND: To 5,000 feet — No fuel is used; No distance is gained.

SEARCH: At 5,000 feet for 3 hours at the speed for maximum endurance.

DESCEND: To 200 feet — No fuel is used; No distance is gained.

SEARCH: At 200 feet for 1 hour at the speed for maximum endurance.

CLIMB: On course with normal power to 29,600 feet cruise altitude, limited to cruise ceiling.

CRUISE-IN: At 29,600 feet at the speed for maximum range.

RESERVE: 10% of the initial fuel load.

MINELAYING

WARM-UP, TAXI, TAKE-OFF: 5 minutes with maximum continuous power at sea level.

CLIMB: On course, with normal power to 19,200 feet cruise altitude, limited to cruise ceiling.

CRUISE-OUT: At 19,200 feet at speed for maximum range.

DESCENT: To 200 feet — No fuel is used; No distance is gained.

PENETRATE: 300 n.mi. at 200 feet with maximum continuous power.

ATTACK: 100 n.mi. at 200 feet with maximum continuous power



RELEASE MINES:

ESCAPE: On course at 200 feet with maximum continuous power for 300 n.mi.

CLIMB: On course with normal power to 34,200 feet cruise altitude, limited to cruise ceiling.

CRUISE-IN: At 34,200 feet at the speed for maximum range.

RESERVE: 10% of the initial fuel load.

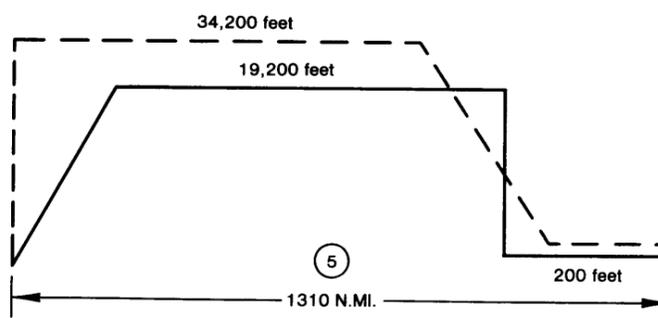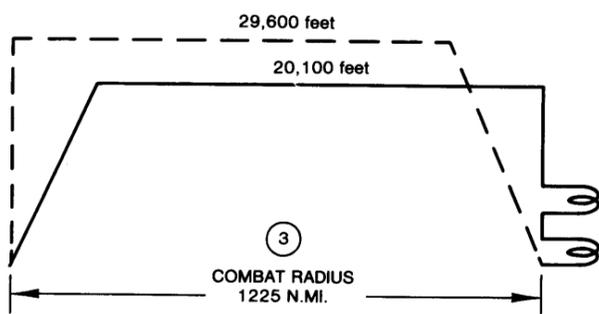

○ LOADING CONDITION COLUMN NUMBER

NOTES

ELECTRONICS (cont')

Non-Accoustical Sensor Data

ESM Set	AN/ALQ-78A
Radar	AN/APS-115B
IFF	AN/APX-72
SIF	AN/APX-76A(V)
SAD	AN/ASA-64A
Compensator	AN/ASA-65(V)2
Compensator	AN/ASA-65(V)5
MAD	AN/ASQ-81(V)2
IRDS	AN/AAS-36
IRDS Video Recorder Group	OA-8962/ASH
Display Group, Tactical Aux (TADS)	OD-159/A

Accoustical Sensor Data

Sonar Computer Recorder Group (Triple Vernier)	AN/AQA-7A(V)6/7
Sono Recorder	AN/AQH-4(V)2
Sonobuoy Recr Sys	AN/ARR-72(V)
CASS (Modified)	AN/ASA-76A
Bathymograph	AN/SSQ-36/RO-308
Sea Noise Meter	ID-1872/A
IACS	OV-78/A

Data Processing/Display

Tact Display	AN/ASA-66
Radar Scan Conv	AN/ASA-69
Tact Display Group	AN/ASA-70
Avionics Unit Computer	AN/ASQ-114(V)4
Data Analysis Proc. Group	AN/AYA-8B
Synchro Converter	CV-2461A/A
Time Code Generator	TD-900A/AS
Digital Data Recorder Reproducer	AN/ASH-33

Armament

Harpoon Aircraft Command Launch Control Set	AN/AWG-19B(V)1
---	----------------



LOADING CONDITION COLUMN NUMBER